


OA92EC XC Series



EC Fan Universal Voltage
92mm x 25mm (3.62" x 0.98")

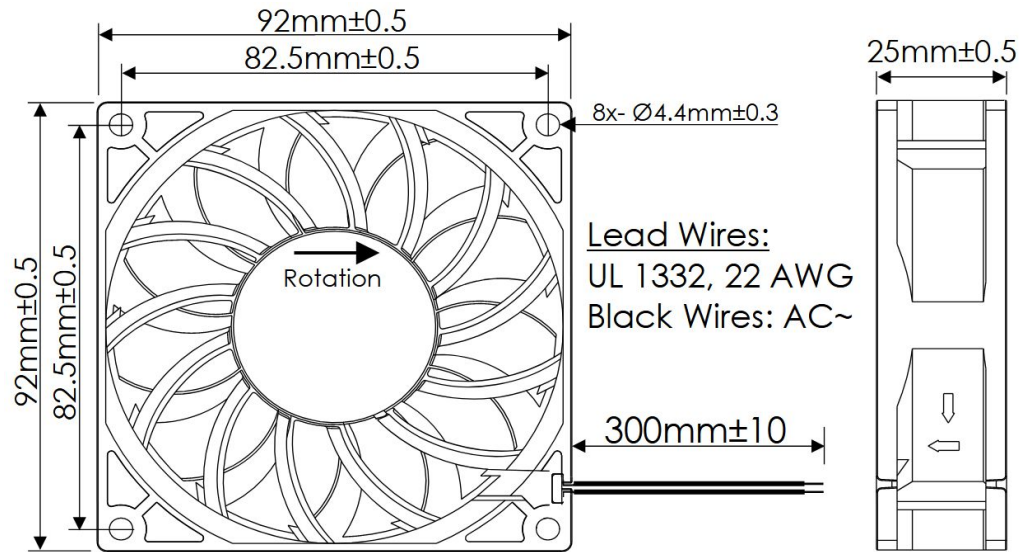

Frame	PBT, UL94 V-0 Plastic	<u>Operating Temperature</u> -20°C ~ +65°C	Static Pressure ("H₂O) Airflow (CFM)
Impeller	PBT, UL94 V-0 Plastic	<u>Storage Temperature</u> -20°C ~ +75°C	
Connection	2x Wire Leads, UL 1332 22 AWG	<u>Life Expectancy</u> 70,000 Hours (L10 at 40°C)	
Motor	Electronically Commutated, Auto Cutoff, Auto Restart, Electronically Protected	<u>Available Options</u> IP Ratings	
Bearing System	Dual Ball Bearings	Weight: 0.22 lbs.	
Dielectric Strength	500VAC/min, <1mA		
Insulation Resistance	≥100MΩ @ 500 VDC		

Part Number	OA92EC-UR-1WBXC
Rated Voltage (Volts AC)	115 / 230
Voltage Range (Volts AC)	85 ~ 265
Frequency (Hertz)	50 / 60
Rated Power (Watts)	8 ~ 6 Max
Rated Speed (RPM)	2600
Max Airflow (CFM)	56
Noise Level (dBA)	35
Max Static Pressure ("H ₂ O)	0.16