


OAB908AN Blower Series



AC Blowers - 115, 230V
183mm x 190mm x 70mm
(7.2" x 7.5" x 2.8")

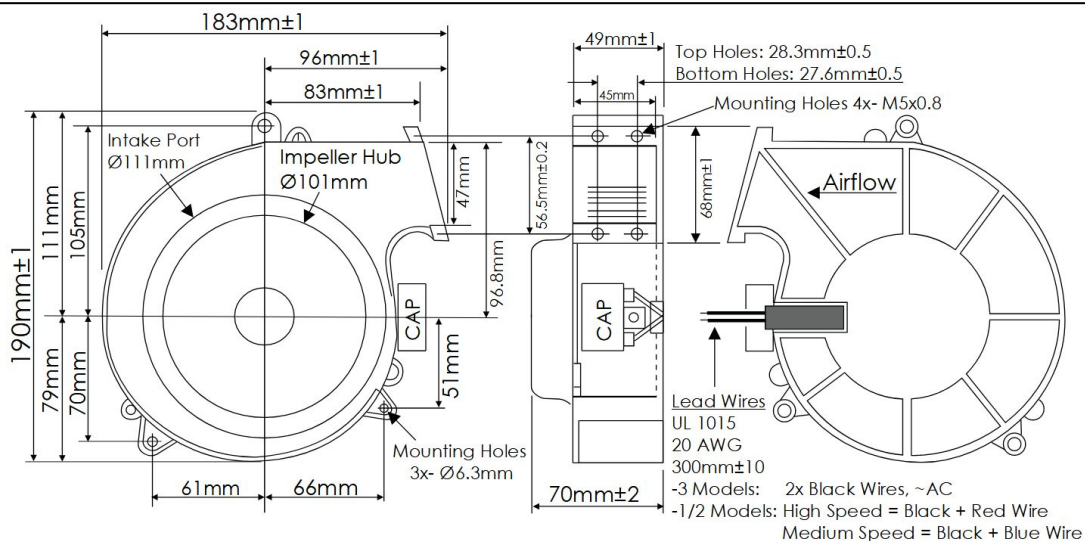

Frame	Die Cast Aluminum, Natural Finish Steel Housing Cover	Operating Temperature -20°C ~ +75°C	
Impeller	PBT UL94 V-0 Plastic	Storage Temperature -40°C ~ +85°C	
Connection	Wire Leads, UL 1015, 20 AWG	Life Expectancy 80,000 Hours (L10 at 45°C) 40,000 Hours (L10 at 60°C)	
Motor	Single Phase, Capacitor Induction, Thermally Protected	Weight: 3.6 lbs.	
Bearing System	Dual Ball Bearings		
Dielectric Strength	500VAC/min, <1mA		
Insulation Resistance	≥10MΩ @ 500 VAC		


Part Number	Speed	Frequency (Hz)	Rated Voltage (Volts AC)	Voltage Range (Volts AC)	Input Power (Watts)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H ₂ O)
OAB908AN-11-1/2*	-1	50 / 60	115	100 ~ 125	65 / 80	2600 / 2800	90 / 100	69.6	1.6 / 1.8
OAB908AN-11-1/2*	-2	50 / 60	115	100 ~ 125	55 / 70	2425 / 2400	80 / 75	56.1	1.5 / 1.4
OAB908AN-22-1/2*	-1	50 / 60	230	200 ~ 260	65 / 80	2600 / 2800	90 / 100	69.6	1.6 / 1.8
OAB908AN-22-1/2*	-2	50 / 60	230	200 ~ 260	55 / 70	2425 / 2400	80 / 75	56.1	1.5 / 1.4
-3 Low Speeds	(Page 2)								

*Dual Speed Fan. Data values in table with slash are for 50 Hertz / 60 Hertz at applicable speed.

OAB908AN Blower Series



AC Blowers - 115, 230V
183mm x 190mm x 70mm
(7.2" x 7.5" x 2.8")

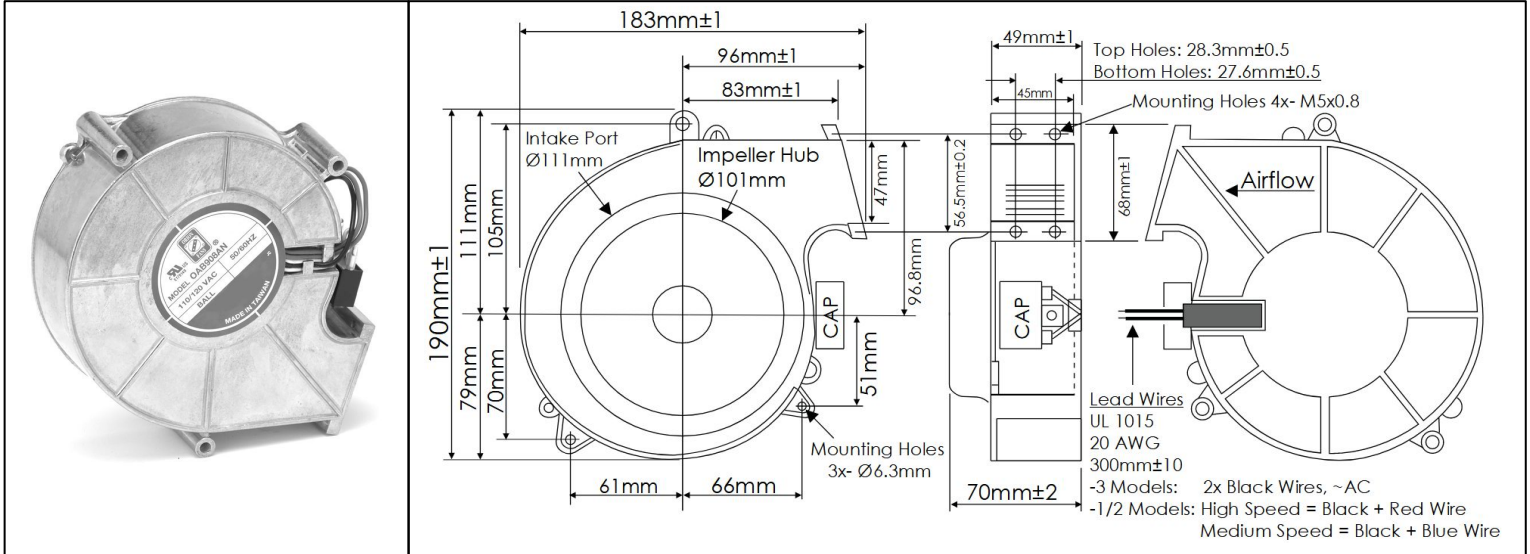

Frame	Die Cast Aluminum, Natural Finish Steel Housing Cover	<u>Operating Temperature</u> -20°C ~ +75°C	
Impeller	PBT UL94 V-0 Plastic	<u>Storage Temperature</u> -40°C ~ +85°C	
Connection	Wire Leads, UL 1015, 20 AWG	<u>Life Expectancy</u> 80,000 Hours (L10 at 45°C) 40,000 Hours (L10 at 60°C)	
Motor	Single Phase, Capacitor Induction, Thermally Protected	Weight: 3.6 lbs.	
Bearing System	Dual Ball Bearings		
Dielectric Strength	500VAC/min, <1mA		
Insulation Resistance	≥10MΩ @ 500 VAC		

Part Number	Frequency (Hz)	Rated Voltage (Volts AC)	Voltage Range (Volts AC)	Input Power (Watts)	Rated Speed (RPM)	Max Airflow (CFM)	Noise Level (dBA)	Max Static Pressure ("H ₂ O)
OAB908AN-11-3	50 / 60	115	100 ~ 125	45 / 60	1400 / 1600	50 / 57	40.1 / 48.5	0.36 / 0.46
OAB908AN-22-3	50 / 60	230	200 ~ 260	45 / 60	1400 / 1600	50 / 57	40.1 / 48.5	0.36 / 0.46